

# SKSIT3611GE

## 36-inch Flex Induction Cooktop

# SKS



### Powerful Center Element

With 7,000 watts of power, the 11-inch dual center element is the most powerful center induction element in the industry\*. This element can boil one quart of water in about a minute.

### Two Flex Cooking Zones

From a small pan to a large griddle, each Flex Cooking Zone combines elements to accommodate different sizes and shapes of cookware. Each zone provides up to 3,700 watts of power.

### Cookware Compatibility Indicator

Quickly shows which pots and pans are induction-ready.

### LCD Touch Control

7-inch color LCD touch control allows for easy interface and use. The seamlessly integrated display is also easy to clean.

### Wi-Fi Enabled For Smart Control

The innovative Wi-Fi feature, powered by ThinQ® Technology, brings modern convenience to the kitchen. Monitor the on/off status of the cooktop elements from a mobile device using the ThinQ® app. When combined with a SKS Hood, ThinQ® Technology lets the cooktop and hood communicate with each other so the elements and fans are synchronized.

### Innovation

|                                                               |     |
|---------------------------------------------------------------|-----|
| Wi-Fi Enabled for ThinQ® Monitoring with iPhone / Android App | Yes |
| Remote Monitoring                                             | Yes |
| Combine Flex Cooking Zones Into One Large Zone                | Yes |

### Cooktop Features

|                                  |                          |
|----------------------------------|--------------------------|
| Frameless Design                 | Yes                      |
| Cooktop Surface                  | Clear Glass, Black Print |
| Number of Elements               | 5                        |
| Control Type                     | Touch Controls           |
| Display                          | 7" TFT LCD               |
| Control Lock                     | Yes                      |
| Hot Surface Indicator            | Yes                      |
| Element Size (inches)            |                          |
| Front (Left & Right)             | 8 1/2 x 7 1/8            |
| Rear (Left & Right)              | 8 1/2 x 7 1/8            |
| Flex Zone (Left & Right)         | 8 1/2 x 14 3/16          |
| Dual Zone Center                 | 11 / 7                   |
| Pan Sensor                       | Yes                      |
| Cookware Compatibility Indicator | Yes                      |

### Cooktop Performance

|                                  |                 |
|----------------------------------|-----------------|
| Front (Left & Right) / Boost     | 1,850 / 3,700 W |
| Rear (Left & Right) / Boost      | 1,850 / 3,700 W |
| Flex Zone (Left & Right) / Boost | 3,300 / 3,700 W |
| Dual Zone Center / Boost         | 3,700 / 7,000 W |

\*Among leading brand 36" induction cooktops when pots over 9" are used.

©2026 LG Electronics Canada, Inc. All rights reserved. "SKS" and the SKS logo are registered trademarks of LG Electronics Inc. Design, features and specifications are subject to change without notice. Specifications are for planning purposes only. Consult the product's installation instructions for final dimensional data and other details prior to making cutouts or custom panels. Consult with a heating and ventilation engineer for your specific ventilation requirements. Non-metric weights and measurements are approximate. Smart features require Internet access.  
1-(888) 289-2802 | [www.sksappliances.com](http://www.sksappliances.com).

SKSIT3611GE

36-inch Flex Induction Cooktop



Technical Specs

|                        |                                  |
|------------------------|----------------------------------|
| ENERGY STAR® Certified | Yes                              |
| Energy Source          | Electric                         |
| Watts                  | 11,100 / 9,000 W<br>(240 / 208V) |
| Required Power Supply  | 240 / 208V,<br>60 Hz, 50 Amp     |
| Plug Type              | No Plug                          |
| Conduit                | 64 1/8"<br>Flexible 3-Wire       |

Dimensions and Weight

|                           |                     |
|---------------------------|---------------------|
| Overall Width (inches)    | 36 5/8 (930 mm)     |
| Overall Height (inches)   | 4 1/8" (105 mm)     |
| Overall Depth (inches)    | 21 1/16" (535 mm)   |
| Net Weight (approx.)      | 48.7 lbs. (22.1 kg) |
| Shipping Weight (approx.) | 56.7 lbs. (25.7 kg) |

Warranty Summary\*

|                                 |         |
|---------------------------------|---------|
| Limited Warranty, Parts & Labor | 3 Years |
|---------------------------------|---------|

UPC Code


|          |              |
|----------|--------------|
| UPC Code | 195174148839 |
|----------|--------------|

# SKSIT3611GE

## 36-inch Flex Induction Cooktop

# SKS

### Standard Installation

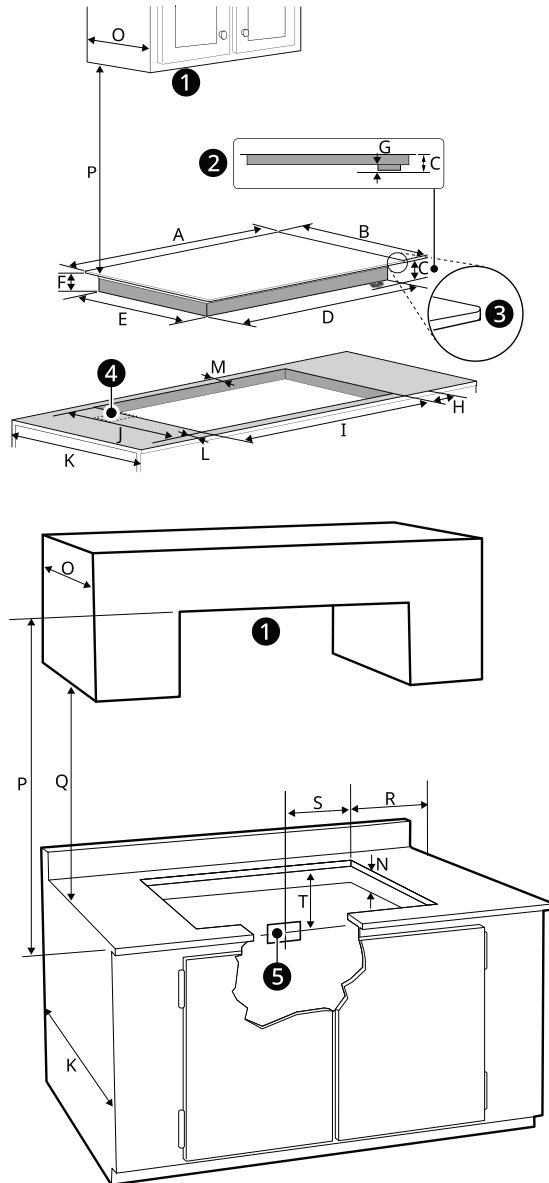

- ❶ Do not obstruct these areas.
- ❷ Right side
- ❸ Radius: 3/8" (10 mm)
- ❹ 4" x 8" (102 mm x 203 mm) opening to route armored cable if panel is present.
- ❺ Approximate location of junction box



| - | Dimension/Clearance                                                                         | 36" Cooktop                                |
|---|---------------------------------------------------------------------------------------------|--------------------------------------------|
| A | Width of upper plate                                                                        | 36 5/8" (930 mm)                           |
| B | Depth of upper plate                                                                        | 21 1/16" (535 mm)                          |
| C | Distance from bottom of upper plate to bottom of conduit                                    | 3 15/16" (101 mm)                          |
| D | Width of cooktop base                                                                       | 33 1/2" (851 mm)                           |
| E | Depth of cooktop base                                                                       | 18 13/16" (477 mm)                         |
| F | Distance from bottom of upper plate to bottom of cooktop base                               | 2 1/2" (64 mm)                             |
| G | Height of conduit                                                                           | 1 7/16" (37 mm)                            |
| H | Distance from side edge of cutout to side of counter                                        | 1 1/8" (28 mm)                             |
| I | Width of cutout                                                                             | ≥ 33 7/8" (860 mm)<br>≤ 33 15/16" (863 mm) |
| J | Depth of cutout                                                                             | ≥ 19 1/8" (486 mm)<br>≤ 19 3/16" (488 mm)  |
| K | Depth of bottom cabinets                                                                    | 23 3/8" (593 mm)                           |
| L | Distance from front of counter to front edge of cutout                                      | ≥ 2 3/16" (55 mm)                          |
| M | Distance from rear edge of cutout to nearest combustible surface                            | ≥ 2 1/16" (52 mm)                          |
| N | Height below cutout (Empty space is needed underneath the cooktop for optimum performance.) | ≥ 5 7/8" (149 mm)                          |
| O | Depth of overhead cabinets                                                                  | ≤ 13" (330 mm)                             |
| P | Clearance from top of cooking surface to bottom of overhead cabinets                        | ≥ 36" (914 mm)                             |
| Q | Clearance from countertop to bottom of adjacent cabinets                                    | ≥ 18" (457 mm)                             |
| R | Distance from edge of cooktop to nearest combustible wall (either side of unit)             | ≥ 2" (50 mm)                               |
| S | Junction box (approximate location)                                                         | 10" (254 mm)                               |
| T | Junction box (approximate location)                                                         | 12" (305 mm)                               |

# SKSIT3611GE

## 36-inch Flex Induction Cooktop

# SKS

### Flush Installation

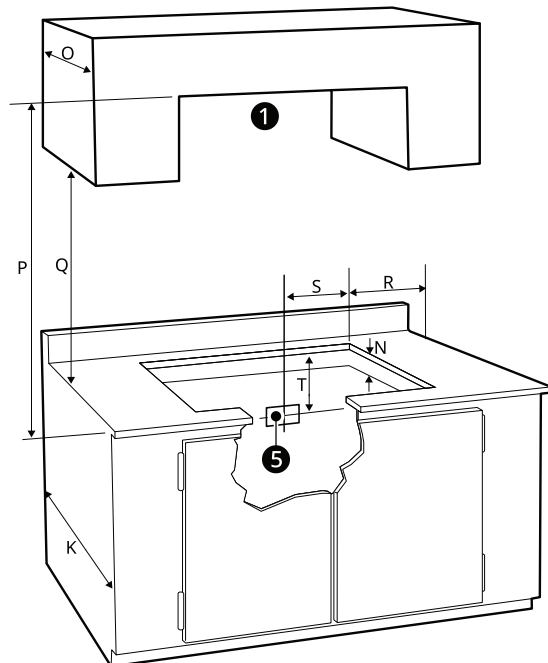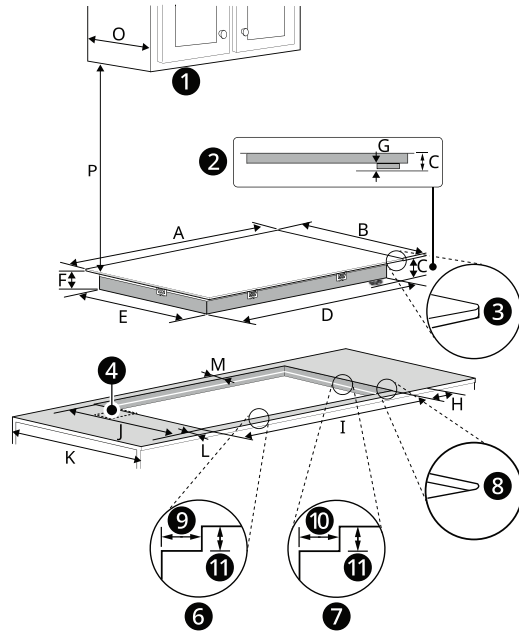

- 1 Do not obstruct these areas.
- 2 Right side
- 3 Radius: 3/8" (10 mm)
- 4 4" x 8" (102 mm x 203 mm) opening to route armored cable if panel is present.
- 5 Approximate location of junction box
- 6 Front and Back Side
- 7 Right and Left Side
- 8 Radius: 1/2" (13 mm)
- 9 3/4" (19 mm)
- 10 1 1/4" (32 mm)
- 11 1/4" (7 mm)

| - | Dimension/Clearance                                                                         | 36" Cooktop                                |
|---|---------------------------------------------------------------------------------------------|--------------------------------------------|
| A | Width of upper plate                                                                        | 36 5/8" (930 mm)                           |
| B | Depth of upper plate                                                                        | 21 1/16" (535 mm)                          |
| C | Distance from bottom of upper plate to bottom of terminal block enclosure                   | 3 15/16" (101 mm)                          |
| D | Width of cooktop base                                                                       | 33 1/2" (851 mm)                           |
| E | Depth of cooktop base                                                                       | 18 13/16" (477 mm)                         |
| F | Distance from bottom of upper plate to bottom of cooktop base                               | 2 1/2" (64 mm)                             |
| G | Height of terminal block enclosure                                                          | 1 7/16" (37 mm)                            |
| H | Distance from side edge of cutout to side of counter                                        | 1 1/8" (28 mm)                             |
| I | Width of cutout                                                                             | ≥ 36 7/8" (936 mm)<br>≤ 37" (939 mm)       |
| J | Depth of cutout                                                                             | ≥ 21 5/16" (541 mm)<br>≤ 21 7/16" (544 mm) |
| K | Depth of bottom cabinets                                                                    | 23 3/8" (593 mm)                           |
| L | Distance from front of counter to front edge of cutout                                      | ≥ 1 7/16" (36 mm)                          |
| M | Distance from rear edge of cutout to nearest combustible surface                            | ≥ 1 5/16" (33 mm)                          |
| N | Height below cutout (Empty space is needed underneath the cooktop for optimum performance.) | ≥ 6" (153 mm)                              |
| O | Depth of overhead cabinets                                                                  | ≤ 13" (330 mm)                             |
| P | Clearance from top of cooking surface to bottom of overhead cabinets                        | ≥ 36" (914 mm)                             |
| Q | Clearance from countertop to bottom of adjacent cabinets                                    | ≥ 18" (457 mm)                             |
| R | Distance from edge of cooktop to nearest combustible wall (either side of unit)             | ≥ 2" (50 mm)                               |
| S | Junction box (approximate location)                                                         | 10" (254 mm)                               |
| T | Junction box (approximate location)                                                         | 12" (305 mm)                               |

SKSIT3611GE

36-inch Flex Induction Cooktop




Cleat Option

For this installation, the countertop cut-out will be the same size as the outer edge of the cooktop glass.

Attach L-shaped support cleats ❶ to the perimeter of the countertop cut-out.


The top edge of the cleat will be attached 1/4" (7 mm) below the surface of the countertop.

Refer to the illustration below. Attach the cleats to the countertop. Consult a countertop supplier for proper methods of attachment.

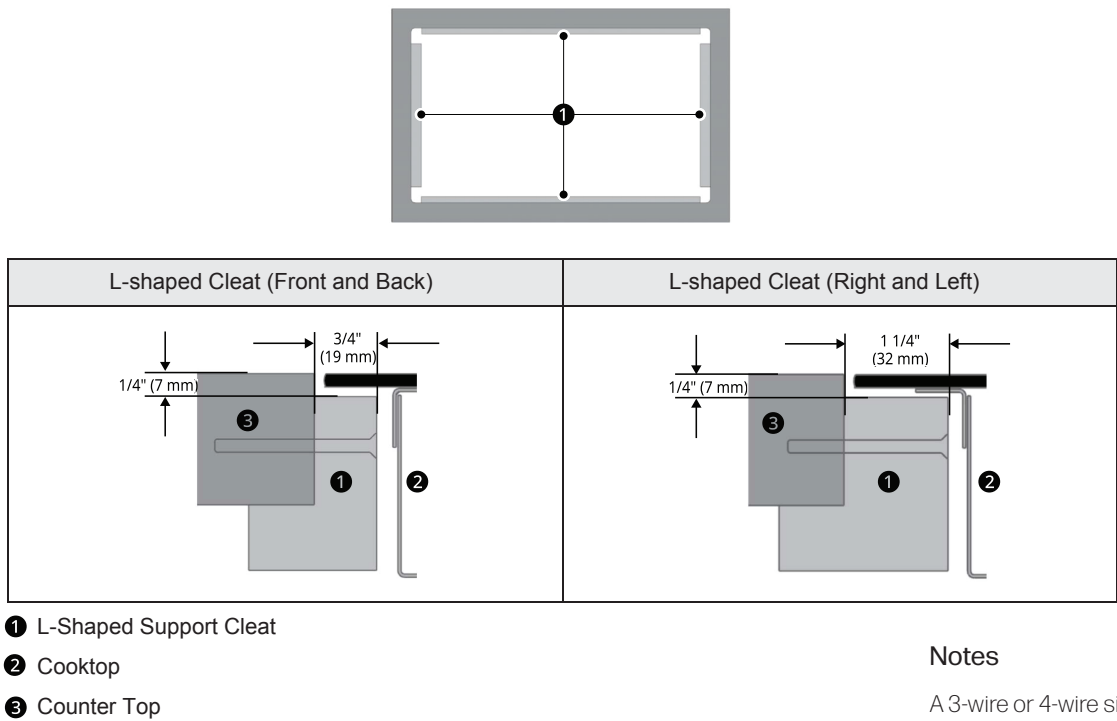

RECOMMENDED SPACING BETWEEN COOKTOP AND DRAWER

 **CAUTION:** It is very important to keep 3 5/16" (85 mm) distance between the cooktop and a drawer or oven underneath it. ❶

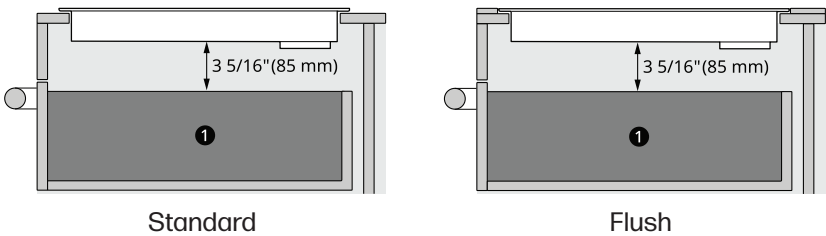

**Notes**

A 3-wire or 4-wire single-phase 120/240 or 120/208 Volt, 60 Hz AC-only electrical supply is required on a separate circuit fused on both sides of the line (time-delay fuse or circuit breaker is recommended). DO NOT fuse neutral. The fuse size must not exceed the circuit rating of the appliance specified on the nameplate.

Minimum distance between cooktop and overhead cabinetry is 36" (914 mm) for a 36" cooktop.

Make sure the cabinets and wall coverings around the cooktop can withstand the temperatures (up to 93°C [200 °F]) generated by the cooktop.

Allow 2" (50 mm) below the armored cable opening to clear the electric cable and allow space for installation of the junction box on the wall at the back of the cooktop.

Thickness of glass: 3/16" (4 mm)