PRELIMINARY PRELIMINARY PRELIMINARY PRELIMINARY PRELIMINARY PRELIMINARY

SKSPW291MT
1.0 cu. ft. 29" Pedestal Washer

SKS



Compatible with SKS Washer SKSWF291MT
Pair with the SKS front-load washer to expand laundry capacity and wash two loads simultaneously. A dedicated second washer provides a curated space for smaller loads while the main washer takes on larger loads.

1.0 cu. ft. Curated Capacity
Thoughtfully sized for smaller loads, the 1.0 cu. ft. capacity provides a dedicated space for everyday essentials, delicate garments and lightly soiled items—while allowing two loads to be washed simultaneously.

Satin Silver Finish
A refined satin silver finish with a modern, understated matte appearance complements the SKS laundry collection.

Electronic Control Panel with Dual LED Display
Intuitive electronic controls and dual LED displays provide clear, at-a-glance information and effortless control at your fingertips.

Capacity

Capacity (cu. ft.)	1.0
Matching Washer	SKSWF291MT

Appearance

Electronic Control Panel with Dual LED Display	Yes
Touch Buttons	Yes

Energy & Water

ENERGY STAR® Certified	No

Wash Cycles

Number of Cycles	6
Wash Cycles	
Normal, Intimates, Hand Wash, Rinse + Spin, Tub Clean, Downloaded	

Wash Options

Number of Options	5
Options	
Warm Water, Rinse, Control Lock, Wi-Fi, Remote Start	

Wash Details

3 Motion Technology	Yes
Number of Wash / Rinse Temps	2 (Warm, Cold)
Max RPM	700
TWIN Wash™ Compatible	Yes

Convenience

End of Cycle Signal	Yes
Control Lock	Yes
Auto Suds Removal	Yes
Forced Drain System	Yes
Leveling Legs	4 Adjustable Legs

©2026 LG Electronics USA, Inc. All rights reserved. "SKS" and the SKS logo are registered trademarks of LG Electronics Inc. Design, features and specifications are subject to change without notice. Specifications are for planning purposes only. Consult the product's installation instructions for final dimensional data and other details prior to making cutouts or custom panels. Consult with a heating and ventilation engineer for your specific ventilation requirements. Non-metric weights and measurements are approximate. Smart features require Internet access.
1-855-790-6655 | www.sksappliances.com

PRELIMINARY PRELIMINARY PRELIMINARY PRELIMINARY PRELIMINARY PRELIMINARY

SKSPW291MT
1.0 cu. ft. 29" Pedestal Washer

SKS

Smart Features

Wi-Fi Enabled	Yes
ThinQ® Technology	Yes
SmartDiagnosis™	Yes
Tub Clean Coach	Yes

Motor and Agitator

Motor Type	Inverter Direct Drive Motor
Motor Speed	Variable
Max RPM	700

Materials and Finishes

Stainless Steel Drum	Yes
Cabinet	Satin Silver
Control Panel	Plastic
Top Cover	Plastic
Door / Rim	Glass / Black
Door Cover	Transparent Tinted Glass

Technical Specs

Ratings	UL Listed
Electrical Requirements	120V, 5 Amps
Type	Electric
Min. / Max. Water Pressure	20 psi – 120 psi

Dimensions

Product (W x H x D)	29" x 14 1/8" x 30 7/8"
Depth with Drawer Open	52 3/4"
Carton Dimensions (W x H x D)	31 9/16" x 16 1/2" x 33 27/32"
Approx. Weight (Product / Carton)	108 lbs. / 118 lbs.

Warranty Summary*

Parts and Labor	3 Years
Direct Drive Motor	10 Years
Drum	10 Years

*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

PRELIMINARY PRELIMINARY PRELIMINARY PRELIMINARY PRELIMINARY PRELIMINARY PRELIMINARY

SKSPW291MT
1.0 cu. ft. 29" Pedestal Washer

SKS

IMPORTANT

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS	
Product (WxHxD)	29" x 14 1/8" x 30 7/8"
Depth with Drawer Open	52 3/4"
Carton Dimensions (in) (WxHxD)	31 9/16" x 16 1/2" x 33 27/32"
POWER SOURCE	
Ratings	UL Listed
Electrical Requirements	120V, 5 Amps

INSTALLATION

⚠ WARNING

- Two or more people are required when moving, unpacking, and stacking the washer. Failure to follow this warning may result in damage to property or serious bodily harm.
- Store and install the washer where it will not be exposed to weather or to temperatures below freezing. Failure to follow this warning can cause serious injury, fire, electric shock, or death.
- Properly ground the washer to conform with all electric governing codes and ordinances. Failure to follow this warning can cause serious injury, fire, electric shock, or death.
- To reduce the risk of electric shock, do not install the washer in humid spaces. Failure to follow this warning can cause serious injury, fire, electric shock, or death.
- To ensure proper air flow, do not block the large opening on the bottom of the washer with carpeting or other materials.
- Do not remove the ground prong. Do not use a 2-prong adapter or 2-wire extension cord. Failure to follow these warnings can cause serious injury, fire, electric shock, or death.

⚠ CAUTION

- This pedestal washer must be installed underneath a matching front-loading LG washing machine manufactured after 2009. (The 29" wide machine must be stacked under a 29" wide LG front-loading washer. The 27" wide machine must be stacked under a 27" wide LG front-loading washer.)
- The pedestal washer will not work as a standalone unit.
- The pedestal washer must be stacked under an LG brand appliance in order to operate properly..


Power Outlet

- The power outlet must be within 60 in. (1.5 m) of either side of the washer.
- The appliance and outlet must be positioned so that the plug is easily accessible.

Flooring

- To minimize noise and vibration, the washer MUST be installed on a solidly constructed floor.
- Allowable slope under the entire washer is a maximum 1 inch. difference from side to side or from front to back.
- Installing on carpeting and soft tile surfaces is not recommended.
- Never install the washer on a platform or weakly supported structure.

PRODUCT DIMENSIONS

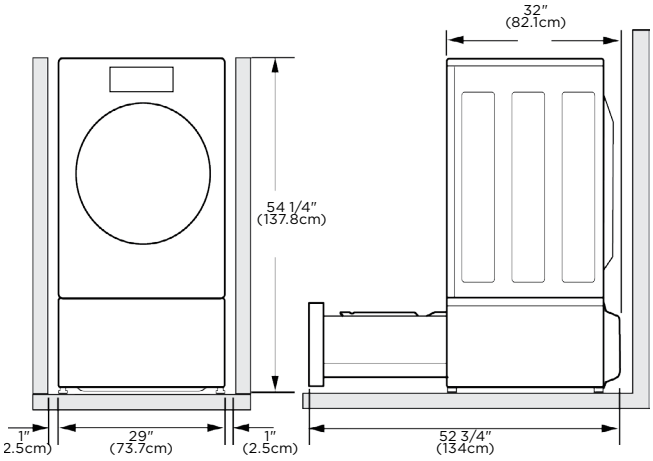


- To ensure sufficient clearance for water lines and airflow, allow minimum clearances of at least 1 in. (2.5 cm) at the sides and 4 in. (10 cm) behind the unit. Be sure to allow for wall, door, or floor moldings that may increase the required clearances.

CONNECTING THE DRAIN HOSE

Please read the Owner's Manual installation instructions first after purchasing this product or transporting it to another location.

CONNECTING THE WATER LINES WITH FULL-SIZE APPLIANCES


1. Front-loading washer and pedestal washer with dryer.



Required for water inlet	
Item	Qty
Y-Connector	2
Short inlet hose	2
Long inlet hose	4

long inlet hoses sold separately

2. Front-loading washer and pedestal washer with Turbo Steam dryer




Required for water inlet	
Item	Qty
Y-Connector	3
Short inlet hose	3
Long inlet hose	5


long inlet hoses sold separately

CONNECTING THE DRAIN HOSE WITH FULL-SIZE WASHER


1. Front-loading washer and pedestal washer with dryer.



2. Front-loading washer and pedestal washer with hybrid dryer



DETAIL VIEW OF DRAIN CONNECTOR CONNECTION



For narrow standpipes, insert hybrid dryer drain hose in center of drain connector. DO NOT insert dryer drain hose further than 1 inch (2.5 cm). Use tie straps to keep hoses in place.