



# SKSCF3611P

## 36-INCH INTEGRATED COLUMN FREEZER

# SKS

### Capacity and Storage (Continued)

Lift and Go™ Ice Drawer	2 (Craft + Cube) Soft Close / Self Close
Lift and Go™ Storage Drawers	3 (1 Cube spare + 1 Middle + 1 Low) Soft Close / Self Close
Metal Lift and Go™ Door Bins (Holds 2-Liter Bottles)	4 Adjustable
Removable Ice Bucket Storage Volume	
Left: Ice Bucket (Craft Ice® Only)	14 spheres
Center: Ice Reserve	4 spheres or 5.0 lbs Frustum Ice
Right: Ice Bucket (Frustum Ice Only)	5.0 lbs Frustum Ice

### General Features

LCD Touch Screen	Yes
Water Filter Indicator	Yes
Ice Production (24 Hrs.) Cubed	3.5 lbs. (3.8 lbs. with IcePlus™)
Ice Production (24 Hrs.) 2 <sup>nd</sup> Generation Craft Ice®	2 Clear or 4 Standard
Ice On / Off	Yes
Enhanced Glass LED Illumination	Yes
Ceiling LED Lighting	Yes
Operating Temperatures	-7° to 5° F
Maximum Sound Level (dBA)	39 dBA
Star-K Certified Sabbath Mode	Yes
ENERGY STAR® Certified	Yes

### Installation Features

Reversible Door	Yes
Four Point Front Adjustable with 4 Wheels	Yes
Attachment Method to Cabinetry	Top with No Visible Screws
Front Serviceable	Yes
Anti-tip Bracket Included	Yes
Joining Kit for Dual Column Installation Included (SKSFJ800P)	Yes

### Technical Specs

Required Power Supply	115 V, 60 Hz, 15 Amp
Plug Type	3-Prong
Power Cord Length	86 1/2"

### Dimensions and Weight

Overall Width (inches)	35 3/4"
Overall Height (inches)	83 1/2" Min. – 84 1/2" Max.
Overall Depth Without Panel or Handles (inches)	23 7/8"
Net Weight (approx.)	(Approx) 480.6 lbs.
Shipping Weight (approx.)	(Approx) 537.9 lbs.

### Optional Accessories

Replacement Water Filter	LT1000P-S
Refer to last page for additional accessories	

### Warranty Summary\*

Limited Warranty, Parts & Labor	3 Years
Limited Warranty, Sealed System and Compressor, Parts & Labor	5 Years
Limited Warranty Compressor, Parts Only	10 Years


\*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

# SKSCF3611P 36-INCH INTEGRATED COLUMN FREEZER



## CUTOUT DIMENSIONS – FLUSH INSTALLATION

### SINGLE COLUMN

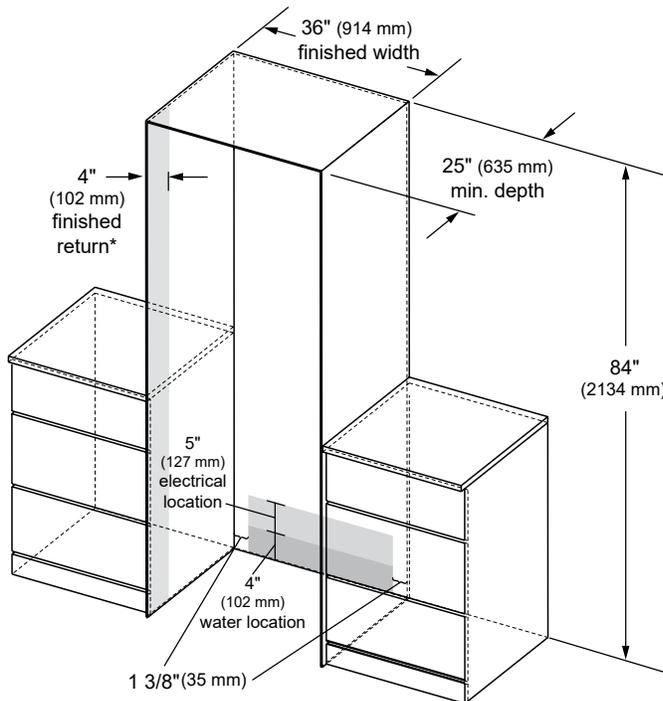

\* A minimum 4" (102 mm) finished return that matches the cabinet exterior is recommended on all sides and the top of the cutout opening. The shaded area will be visible after installation.

### Notes

Freezer can be installed flush with 3/4" custom panel or optional stainless steel panel kit.

With a 25" (635 mm) cutout depth, the front face of the freezer fits flush with 25" (635 mm) depth adjacent cabinets.

### Electrical

A 115V, 60Hz., 15 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall. Electrical must be located on rear wall as shown.

**Note:** GFI (ground fault interrupter) is not recommended.

### Water Line

A cold water supply is required for automatic icemaker operation. Water pressure must be between 20 and 120 p.s.i.


Tubing should be long enough to extend to the front of the freezer. Allow enough tubing to accommodate a bend leading into the water line connection.

Water line can enter an opening through floor or back wall.

Install a shut-off valve between the icemaker water valve and cold water supply in the home.

## INSTALLATION CLEARANCES – FLUSH INSTALLATION

### TOP VIEW

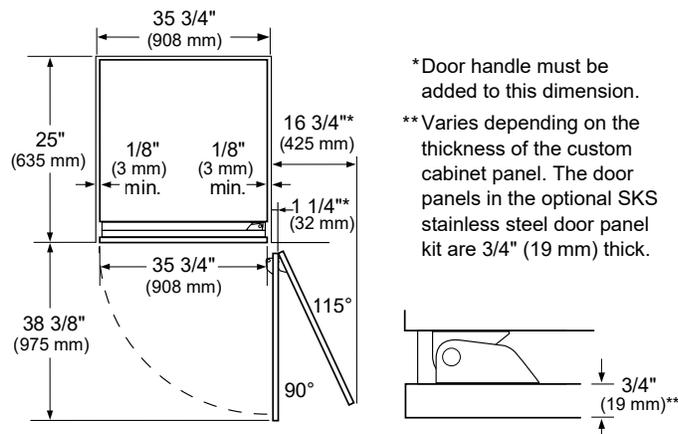

\* Door handle must be added to this dimension.

\*\*Varies depending on the thickness of the custom cabinet panel. The door panels in the optional SKS stainless steel door panel kit are 3/4" (19 mm) thick.

### Notes

**Door Swing Clearances** – The installation must allow for clearances to adjacent walls or cabinets. This freezer is equipped with a 2-position door stop. The factory-set 115° door swing can be adjusted to 90° if clearance to adjacent cabinets or walls is restricted.

**Door Handle Clearances** – The Door Handle depth must be added to the dimension noted to determine the total clearances required from adjacent cabinets or walls. This clearance will vary depending on the custom handle used. When using the Stainless Steel Door Panel Kit w/Handle or the Brushed Aluminum Handle (optional accessories), the door handle clearance with door open 115° is 16" (406 mm).


# SKSCF3611P

## 36-INCH INTEGRATED COLUMN FREEZER




### OVERALL PRODUCT DIMENSIONS

#### FRONT VIEW

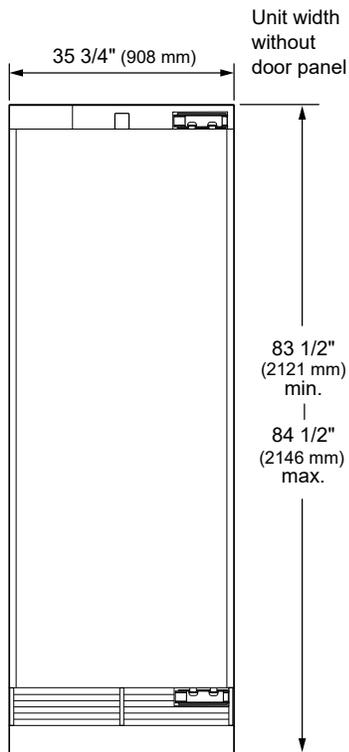


#### SIDE VIEW

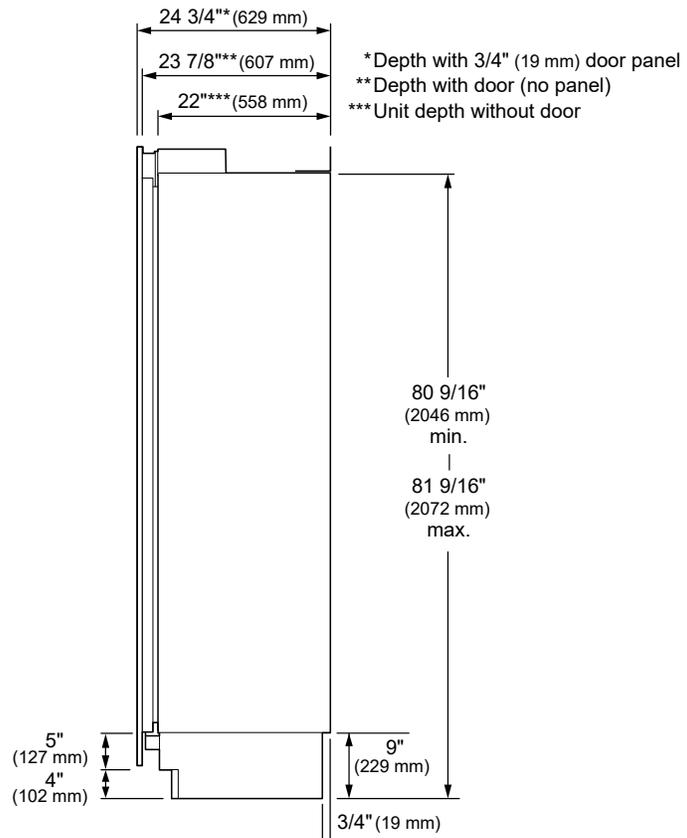


#### TOP VIEW


##### DOOR OPEN 90°

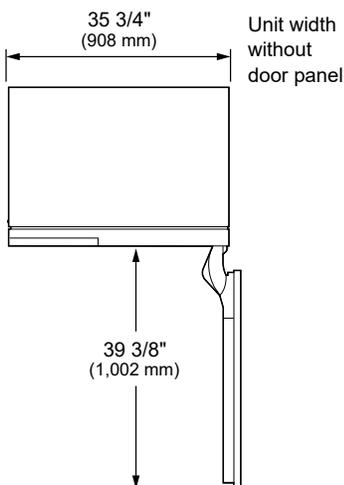

##### DOOR OPEN 115°

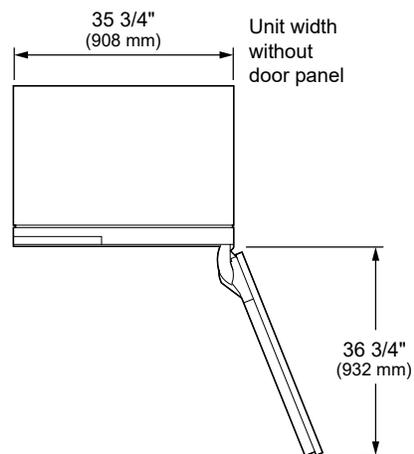

**CUSTOM PANEL DIMENSIONS**

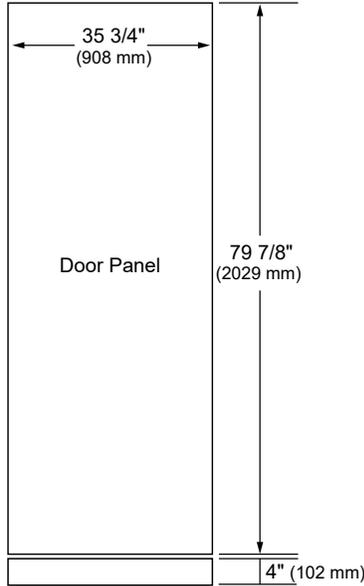

**Notes**

These units are designed to be customized with decorative panels. Field-installed custom door panels or an optional Stainless Steel Panel Kit is required.

**For Custom Panels:** Use templates provided with units to pre-drill holes for mounting panel brackets (provided with unit). Adjustment screws and instructions also provided with units.

**Maximum Total Door Panel Weights:**

- 36-Inch Integrated Column – 64 lbs.
- 30-Inch Integrated Column – 64 lbs.
- 24-Inch Integrated Column – 53 lbs.
- 18-Inch Integrated Column – 44 lbs.


**Design Tips**

4" (102 mm) will be visible on the interior sides of the furniture return. It is recommended that both sides of each cutout panel be finished to match the cabinet exterior.

If using custom panels, a custom toe kick is required. The bottom of case is unfinished.

**Door Handles:** Handles are not included with the units. Custom handles are required for installation. Brushed Aluminum Handles are available as an optional accessory.

**OPTIONAL ACCESSORIES**

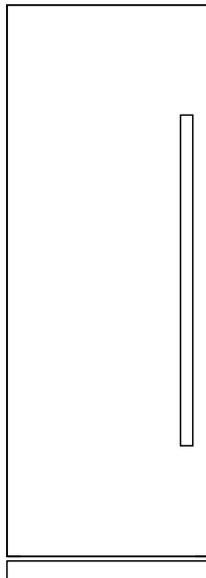

	<b>Professional</b>	<b>Transitional</b>
Stainless Steel Panel / Handle / Toekick Kit	SKSPK365CS	SKSPK365CMT
Retrofit Frame Kit	SKSFK800CS	
Brushed Aluminum Handle		
Medium – 31 11/16"	SKSHK310HS	SKSHK310HST
Long – 48" (For Columns)	SKSHK480HS	SKSHK480HST

**Included Accessories**

Joining Kit for Dual Column Installation (SKSFJ800P)

**Refer to the Integrated and Built-in Refrigeration Planning / Installation Guide for details on installing multiple columns, door swing dimensions, cabinet planning, retrofit installation and more.**